11 m Bus 1 Passenger Door+ 1 Driver door 1 Passenger Door+ 1 Driver door 65+D (3x2) 70+D (3x2)

Also available in 2X2, 3X2, and 2 passenger door configurations.

TATA LPO 1622 E6 SPECIFICATIONS			
Vehicle Brief	LPO 1622 Euro-6	Overall (L x W x H)	11380 mm x 2570 mm x 3650 mm/12280 mm x 2570 mm x 3650 mm
Engine	Cummins ISBe 5.6L Diesel Euro-6	Wheelbase	5600 mm/6200 mm
Gear Box	TATA G-750, manual, 6F+1R	GVW (FAW, RAW)	16200 kg
Clutch Dia.	380 mm	Fuel Tank Capacity	350 L
Brake	Full air brakes with ABS & ESC	Max. Speed	107 kmph (Staff), 80 kmph (School)
Suspension	Parabolic leaf spring (Front & Rear)	Rated Peak Power	220 hp @ 2300 RPM
Steering	Hydraulic power steering (tilt & telescopic steering column)	Rated Max. Torque	925 Nm @ 1000-1600 RPM
Туге	295/80 R22.5 -16 PR	Gradeability	32%
Applications	Staff, School	Air Condition	HVAC, 47 KW-with drop-down AC duct
Doors	1 passenger door + 1 driver door (Optional: 2 passenger doors)	Advanced Features	ABS+ESC, Hill Start Assist, Multimode switch, Gear Shift advisor, Cruise control
Seating Configuration	65+D, 61+D/70+D**	Turning Circle Dia. (m)	19 m/21.2 m

For more information, please contact:

Tata Motors


International Business - Commercial Vehicles, A Block, Shiv Sagar Estate, Dr. Annie Besant Road, Worli, Mumbai, Maharashtra - 400 018, India.

Tel.: 91 22 67577200 | Fax: 91 22 67577225 Website: www.tatamotors.com




Back Pg-8

Open Size: 57 W X 20 H cms Closed Size: 28.5 W X 20 H cms

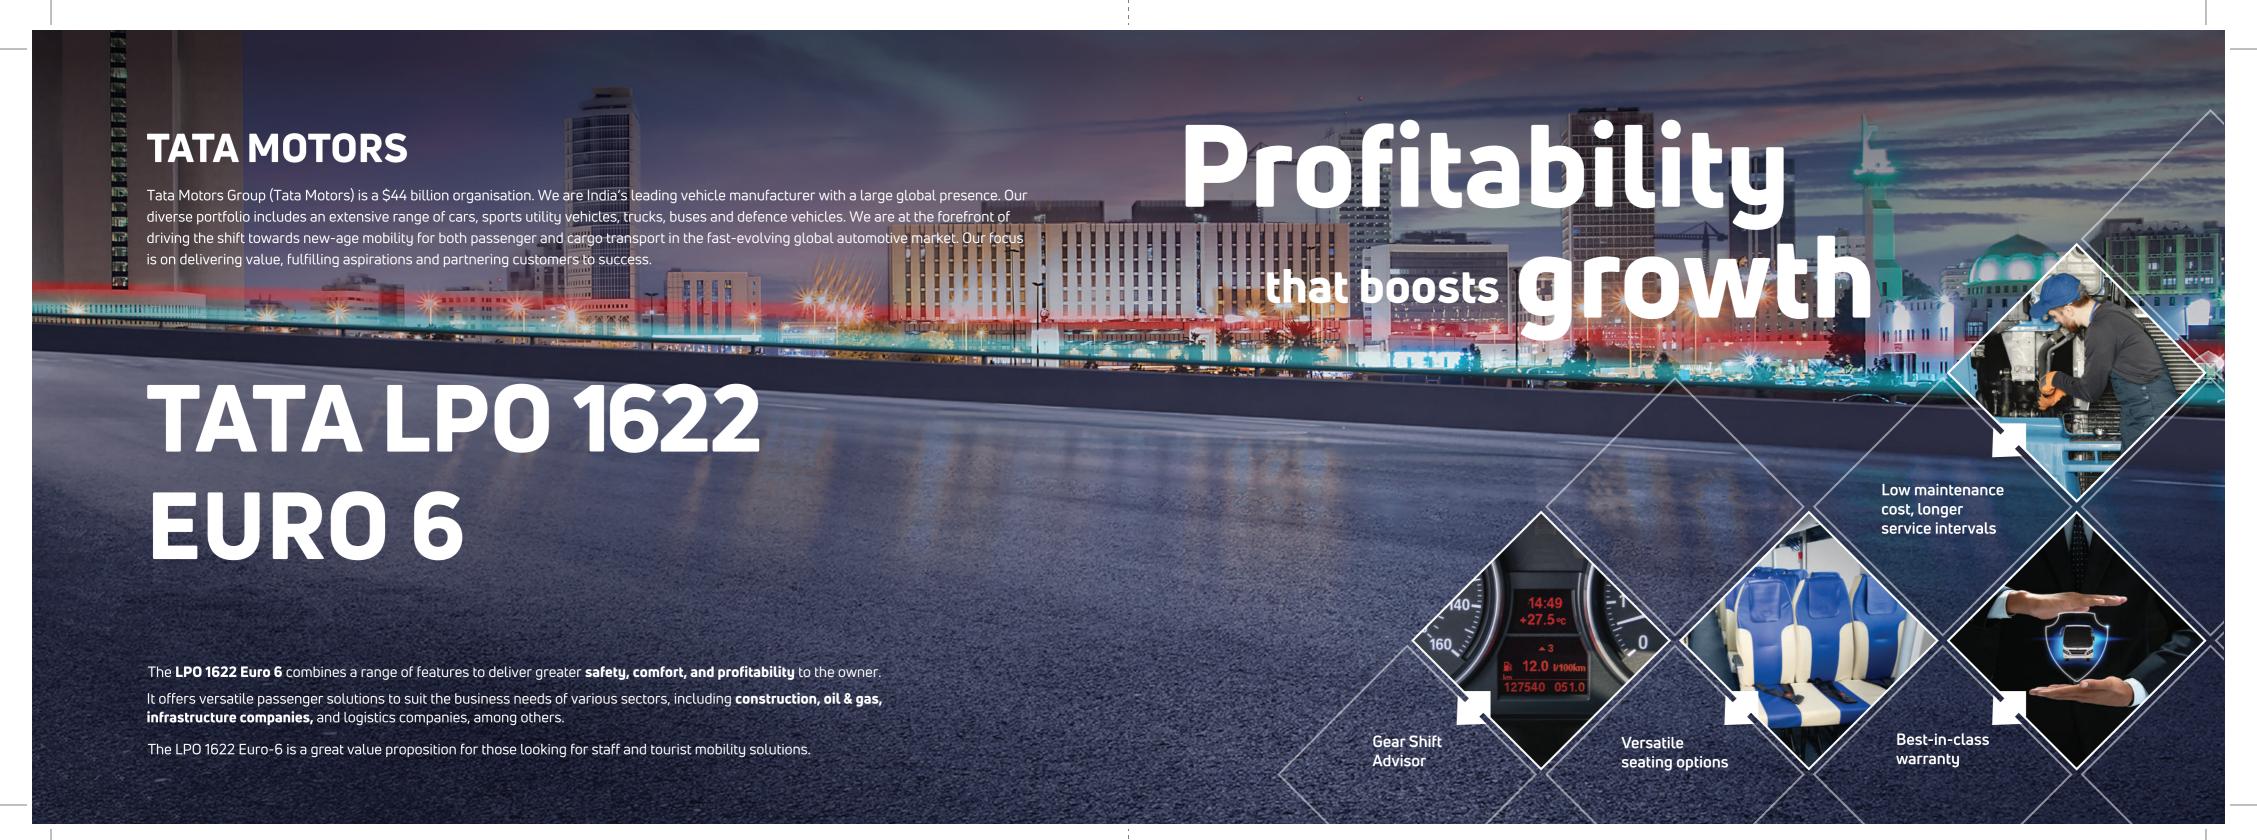

Comfort that drives growth



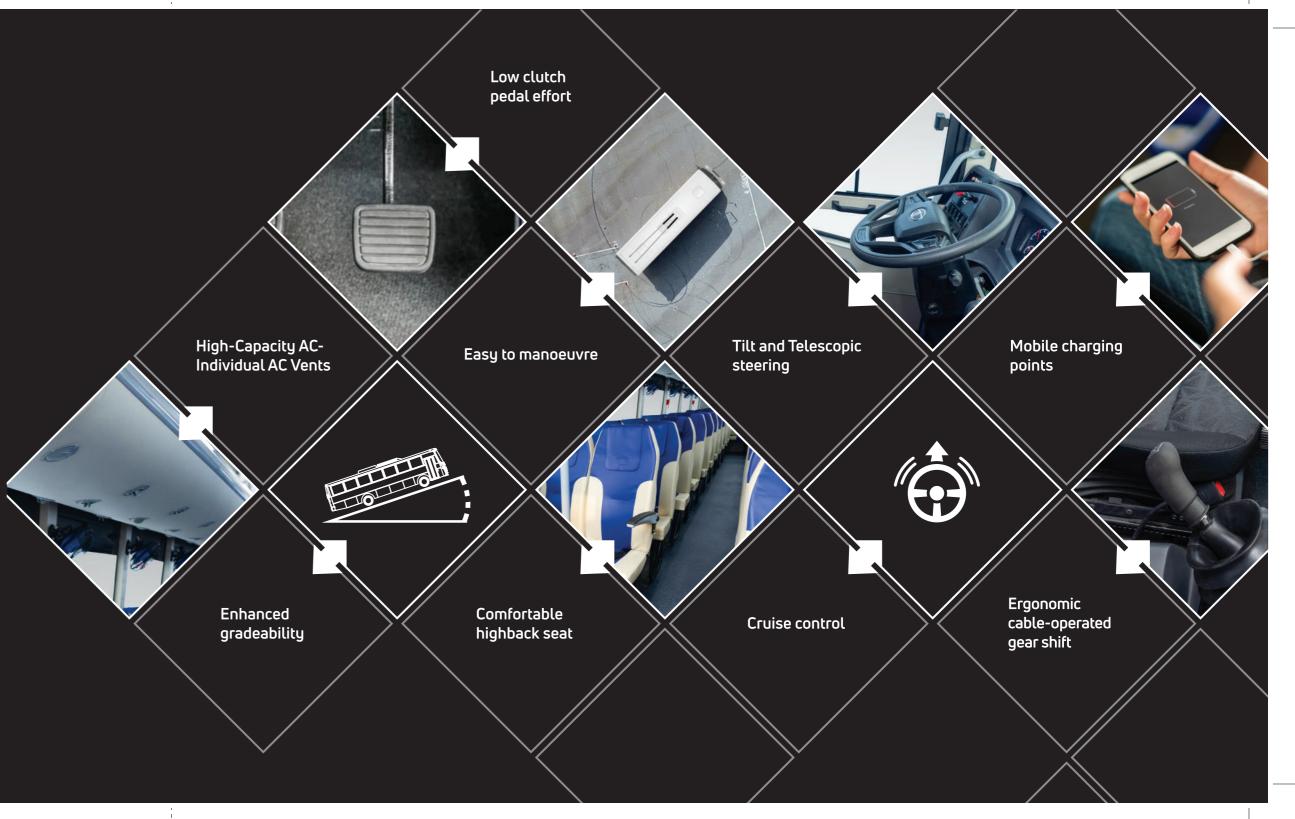

Pg-04



Pg-06